

## Signalling with AC BUZZER

## Door intercommunication


### House telephone -HT-

Wall mounting telephone handset flat compact construction of impact-resistant plastic, integrated signal generator, two operating keys (door opener, light call).

### Door station -TT-

with anodized aluminium, external station consisting of a dynamic loudspeaker and a microphone, illuminated nameplate/bell key and housing for flush installation.

Cable requirements: 5 cores + 1 core per station.

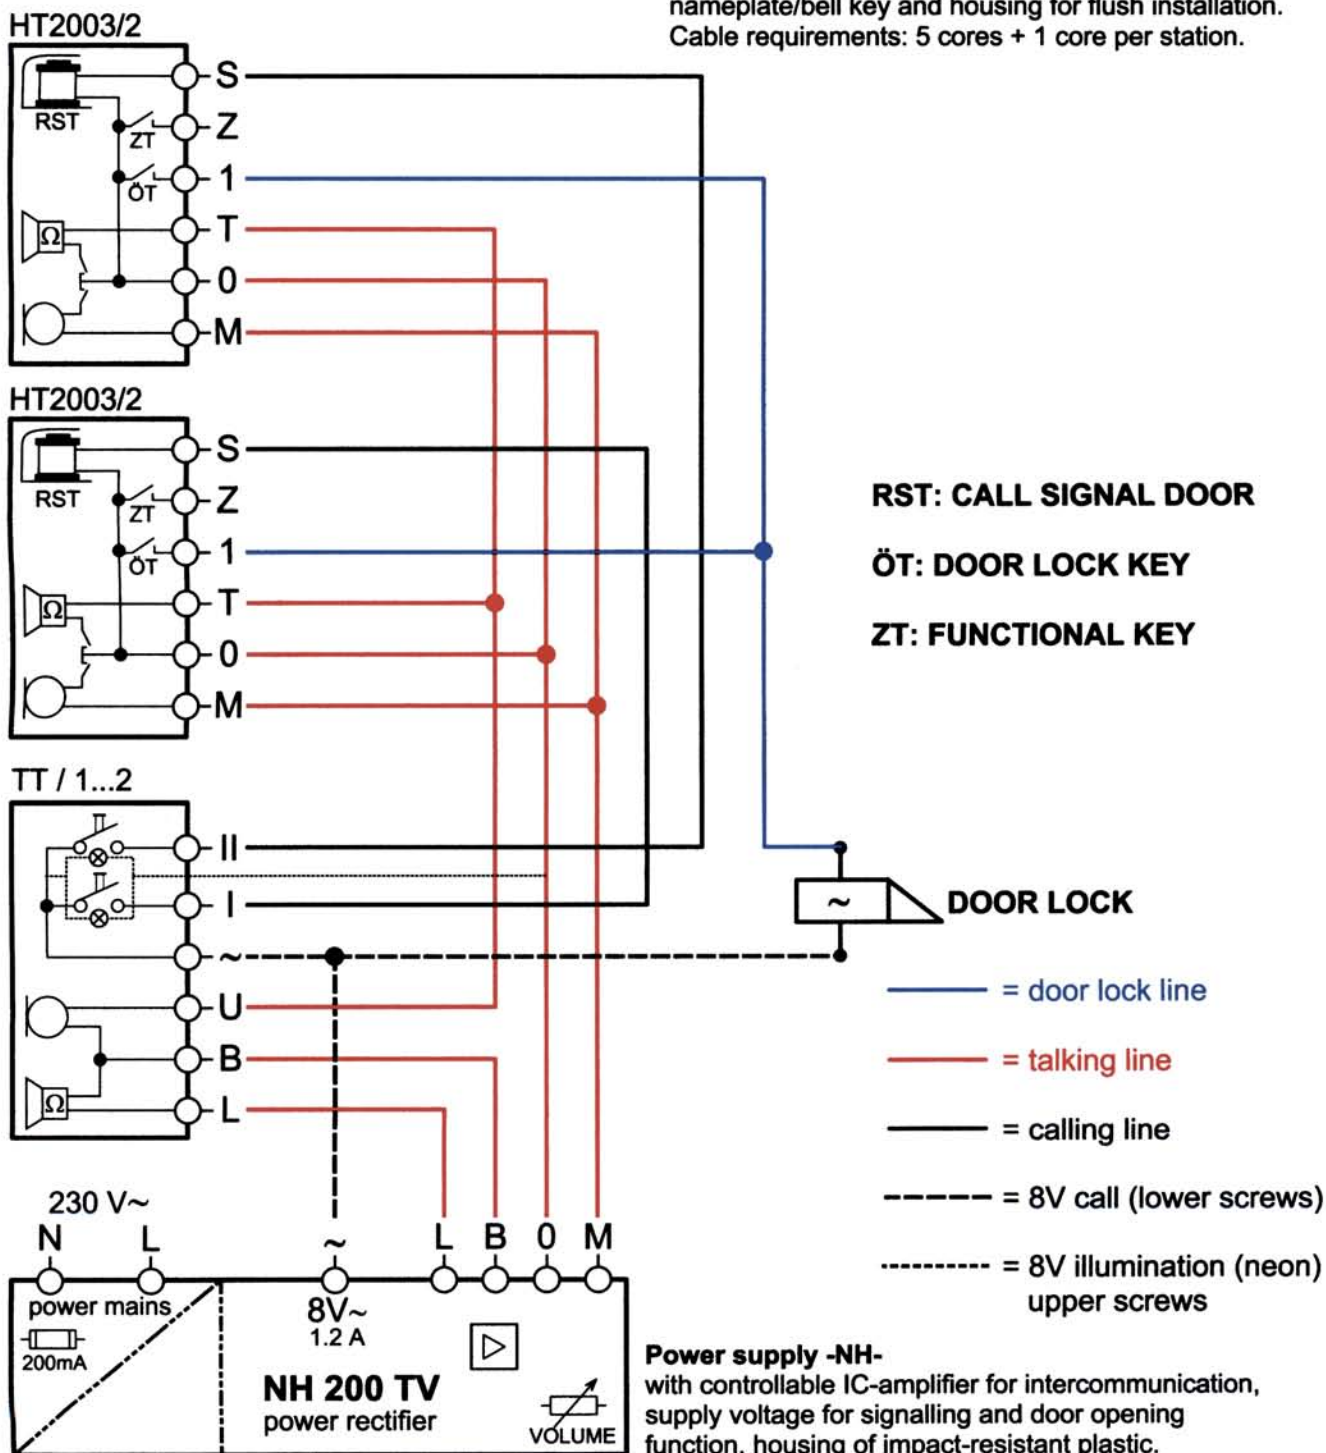

STANDARD  
INTER-  
COMMUNICATION  
EQUIPMENT

System:

» NH 200 «

2 PHONE ONLY  
KIT

# Signalling with AC Buzzer


## intercommunication

House telephone - HT -



PHONE to PHONE communication  
without doorstation

interphone

HT 2003/2

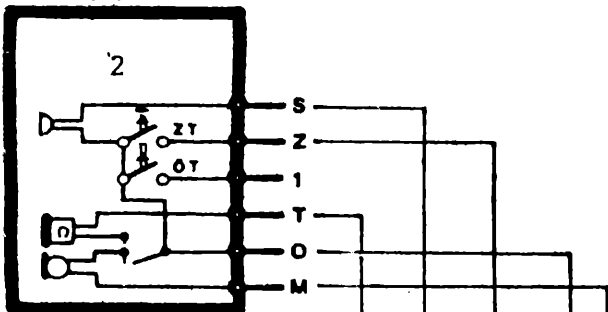

HT 2003/2

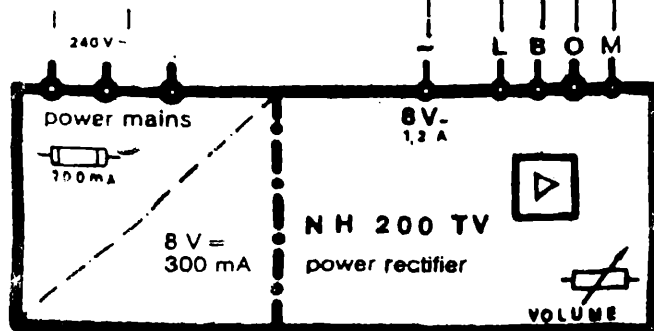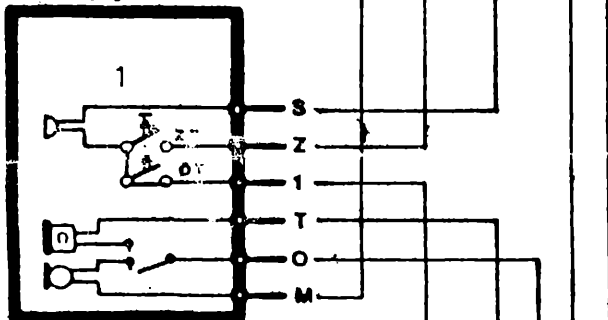

Supply mains apparatus - NH -  
with controllable IC-amplifier for intercommunication,